



FLOW^{EVO}

Infrared gas sensor

SO₂ // Sulfur Dioxide // 2000 ppm

smartGAS item number: F3-432205-05000

- Pre calibrated
- Compact design
- 3/5 mm gas line connectors
- 3.3 - 6 V DC supply voltage
- Modbus ASCII or RTU
- Status indication by LED
- Low drift

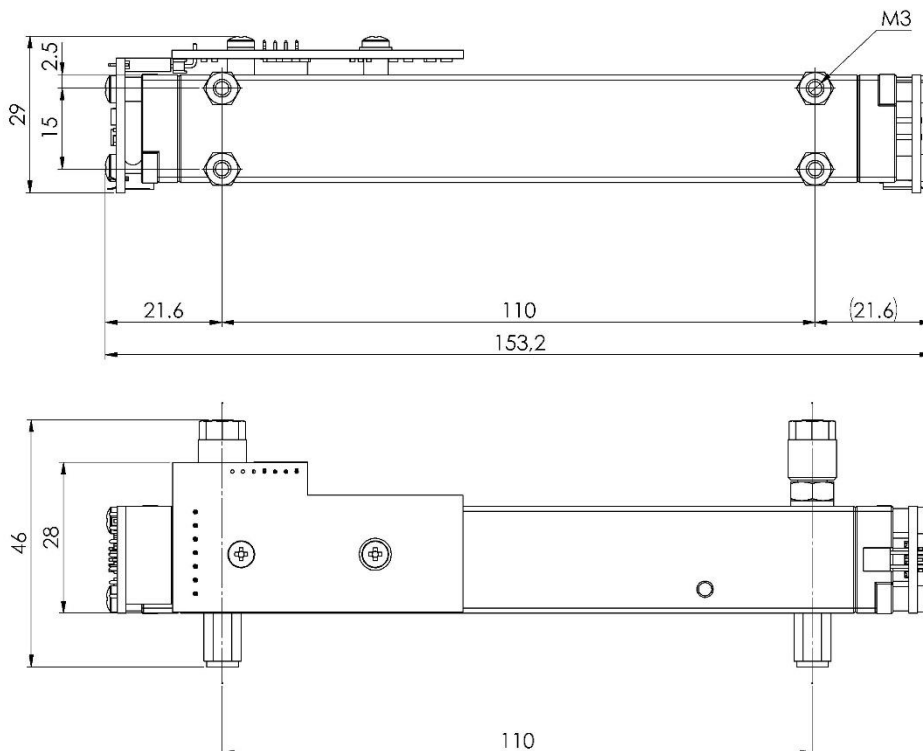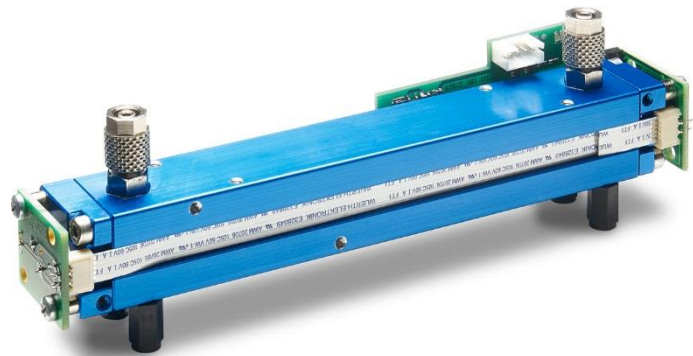

APPLICATION EXAMPLES

EMISSION MONITORING // PROCESS CONTROL // LAB ANALYSING // ENVIRONMENTAL ANALYSING // FOOD INDUSTRY

F3-432205-05000		SO₂ // Sulfur Dioxide // 2000 ppm	
General features			
Measurement principle:	Non Dispersive Infra-Red (NDIR), dual wavelength		
Measurement range:	0 ... 2000 ppm Full Scale (FS)		
Gas supply:	by flow (nearly atmospheric pressure)		
Flow rate:	0.1 ... 1.0 l / min		
Mounting dimensions:	156 mm x 30 mm x 50 mm (L x W x H)		
Warm-up time:	< 2 minutes (start up time) < 30 minutes (full specification)		
Measuring response*			
Digital resolution:	1 ppm		
Response time @ 0.7 l / min**:	<i>Standard:</i>	<i>Fast:</i>	
t ₉₀ (10 to 90 % FS):	≤ 11.6 s	≤ 0.9 s	
t _{on} (0 to 90 % FS):	≤ 15.9 s	≤ 1.6 s	
Detection limit (3 σ):	≤ 12 ppm	≤ 28 ppm	
Repeatability:	≤ ± 15 ppm		
Linearity error (straight line deviation):	≤ ± 20 ppm		
Long term stability (zero):	≤ ± 90 ppm over 1000 h period		
Long term stability (span):	≤ ± 110 ppm over 1000 h period		
Influence of T, P, flow rate, other*			
Temp. dependence (zero):	≤ ± 2 ppm per °C		
Temp. dependence (span):	≤ ± 4 ppm per °C		
Pressure dependence:	+ 0.121 % of actual reading / hPa		
Flow rate dependence:	≤ ± 3 ppm per 0.1 l / min		
Cross sensitivity (zero) other gases:	≤ ± 10 ppm @ 10 Vol.-% CO ₂ in dry air		
Gas dew point requirement:	< + 5°C		
Electrical inputs and outputs			
Supply voltage:	3.3 V ... 6.0 VDC		
Supply current (peak):	< 400 mA @ 3.3 V, < 240 mA @ 5.0 V		
Inrush current:	< 600 mA		
Average power consumption:	< 800 mW		
Digital output signal:	Modbus ASCII / RTU via UART, autobaud, autoframe		
Calibration:	zero and span by SW		
Climatic conditions			
Operating temperature:	0 ... + 50 °C		
Storage temperature:	-20 ... + 60 °C		
Air pressure:	800 ... 1150 hPa		
Ambient humidity:	0 ... 95 % relative humidity (not condensing)		
* Typical values related to 1013 hPa, T _a = 22 °C, flow = 0.7 l / min for dry (not condensing) and clean sample gas. Stated values exclude calibration gas tolerance.			
** Adjustable only via smartGAS Calibration-Tool SW.			

All rights reserved. Any logos and/or product names are trademarks of smartGAS. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of smartGAS is strictly prohibited. All specifications – technical included – are subject to change without notice. Depending on the application, the target gas and the measurement range the technical data may differ. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale.

For more information, please visit www.smartgas.eu or contact us at sales@smartgas.eu

Please consult smartGAS sales for parts specified with other temperature and measurement ranges. At first initiation and depending on application and ambient conditions recalibration is recommended. Recurring cycles of recalibration are recommended.