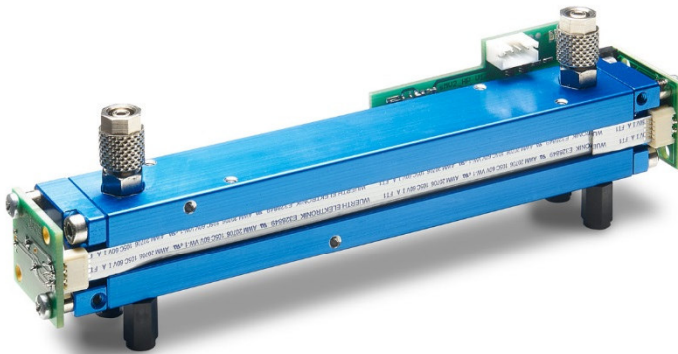
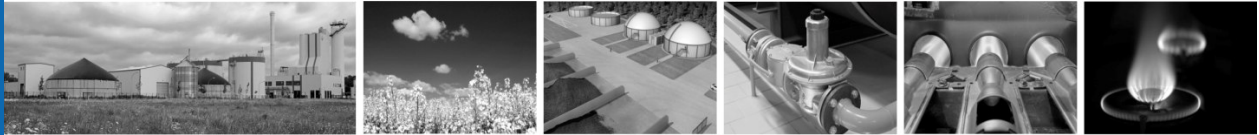


FLOW^{EVO}

Infrared gas sensor CH₄ // Methane // 2.5 Vol.-% // (also applicable for CH₃Br // Bromomethane // Appr. 5.8 Vol.-%)
smartGAS item number: F3-042256-05004



*Illustration similar (gold coated)

- Pre calibrated
- Compact design
- 3/5 mm gas line connectors
- 3.3 – 6.0 V DC supply voltage
- Modbus ASCII or RTU
- Status indication by LED
- Low drift

Non Dispersive Infrared (NDIR) gas sensor for gas analysis using dual wavelength technology.

Designed for process control of CH₄ or (using a correction factor of ~ 2.3) also applicable for fumigation control (CH₃Br). The special gold coated sample cell protects the sensor against corrosion or wearing of the optical surfaces.

The FLOW^{EVO} sensor can easily be integrated into OEM systems, where long term stability, repeatability and reliable performance are required. It can be used for stack gas monitoring, in incineration plants but also for fumigation processes and container transport. High-precision NDIR technology requires little maintenance compared to conventional chemical sensors and its small detection limits and long life expectancy qualify our NDIR sensors for numerous tasks in countless areas of scientific research.

APPLICATION EXAMPLES

FUMIGATION MONITORING of CH₃Br
PROCESS CONTROL of CH₄

FLOW ^{EVO}

Infrared gas sensor CH₄ // Methane // 2.5 Vol.-% // (also applicable for CH₃Br // Bromomethane // Appr. 5.8 Vol.-%)
 smartGAS item number: F3-042256-05004

General features	
Measurement principle:	Non Dispersive Infra-Red (NDIR), dual wavelength
Measurement range:	0..2.5 Vol.-% Full Scale (FS)
Gas supply:	by flow (nearly atmospheric pressure)
Flow rate:	0.1 .. 1.0 l / min
Dimensions:	113 mm x 30 mm x 36 mm (L x W x H)
Warm-up time:	< 2 minutes (start up time) < 30 minutes (full specification)
Measuring response*	
Response time (t ₉₀):	Appr. 12 s @ 0.7 l / min
Digital resolution (@ zero):	0.001 Vol.-%
Detection limit (3 σ):	≤ 0.015 Vol.-%
Repeatability:	≤ ± 0.03 Vol.-%
Linearity error (straight line deviation):	≤ ± 0.04 Vol.-%
Long term stability (span):	≤ ± 0.05 Vol.-% over 1000 h period
Long term stability (zero):	≤ ± 0.05 Vol.-% over 1000 h period
Influence of T, P, flow rate, other*	
Temp. dependence (zero):	≤ ± 0.01 Vol.-% per °C
Temp. dependence (span):	≤ ± 0.01 Vol.-% per °C
Pressure dependence:	+ 0.1 % of measured value / hPa
Flow rate dependence:	≤ ± 0.02 Vol.-% per 0.1 l / min
Cross sensitivity (zero) other gases:	Appr. 2.5 Vol.-% @ 5.8 Vol.-% CH ₃ Br in dry air
Electrical inputs and outputs	
Supply voltage:	3.3 V .. 6.0 V DC
Supply current (peak):	< 400 mA @ 3.3 V, < 240 mA @ 5.0 V
Inrush current:	< 600 mA
Average power consumption:	< 800 mW
Digital output signal:	Modbus ASCII / RTU via UART, autobaud, autoframe
Calibration:	zero and span by SW
Climatic conditions	
Operating temperature:	0 .. + 50 °C
Storage temperature:	-20 .. + 60 °C
Air pressure:	800 .. 1150 hPa
Ambient humidity:	0 .. 95 % relative humidity (not condensing)
* Typical values related to 1013 hPa, T _a =22 °C, flow = 0.7 l / min for dry (not condensing) and clean sample gas. Stated values exclude calibration gas tolerance.	

All rights reserved. Any logos and/or product names are trademarks of smartGAS. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of smartGAS is strictly prohibited. All specifications – technical included – are subject to change without notice. Depending on the application, the target gas and the measurement range the technical data may differ. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale.

For more information, please visit www.smartgas.eu or contact us at sales@smartgas.eu

Please consult smartGAS sales for parts specified with other temperature and measurement ranges.

At first initiation and depending on application and ambient conditions recalibration is recommended. Recurring cycles of recalibration are recommended.